

salzer

salzer

salzer

products approved in 2023



www.salzer-electric.com

We remain the right to change the specification at any time without notice.



樂清市樂怡電器有限公司
YUEQING LEYI ELECTRIC CO., LTD.

Push Button Plastic Series

Shape	Reference	Contact Type	Colour	Voltage	Remark
	SA22-AA21	NO	(Black)		Flush
	SA22-AA31	NO	(Green)		
	SA22-AA42	NC	(Red)		
	SA22-AA51	NO	(Yellow)		
	SA22-AA61	NO	(Blue)		
	SA22-AA25	NO+NC	(Black)		
	SA22-AA35	NO+NC	(Green)		
	SA22-AA45	NO+NC	(Red)		
	SA22-AC21	NO	(Black)		Spring return AC: Φ40 AR: Φ60
	SA22-AC31	NO	(Green)		
	SA22-AC42	NC	(Red)		
	SA22-AC51	NO	(Yellow)		
	SA22-AR21	NO	(Black)		
	SA22-AR31	NO	(Green)		
	SA22-AR42	NC	(Red)		
	SA22-AR51	NO	(Yellow)		
	SA22-AS442	NC	(Red)	Φ30	Turn to release Φ30 Φ40 Φ60
	SA22-AS542	NC		Φ40	
	SA22-AS642	NC		Φ60	
	SA22-AD21	NO			2-position locked 2-position locked 3-position locked 2-position reset 2-position reset 3-position reset
	SA22-AD25	NO+NC			
	SA22-AD33	NO+NO			
	SA22-AD41	NO			
	SA22-AD45	NO+NC			
	SA22-AD53	NO+NO			
	SA22-AJ21	NO			2-position locked 2-position locked 3-position locked 2-position reset 2-position reset 3-position reset
	SA22-AJ25	NO+NC			
	SA22-AJ33	NO+NO			
	SA22-AJ41	NO			
	SA22-AJ45	NO+NC			
	SA22-AJ53	NO+NO			

Push Button Plastic Series

Shape	Reference	Contact Type	Colour	Voltage	Remark
	SA22-AG21	NO			2-position locked 2-position locked 3-position locked 2-position reset 2-position reset 3-position reset
	SA22-AG25	NO+NC			
	SA22-AG33	NO+NO			
	SA22-AG61	NO			
	SA22-AG65	NO+NC			
	SA22-AG73	NO+NO			
	SA22-AT42	NC	(Red)		Muchroom Push-pull Φ40 Φ60
	SA22-AT845	NO+NC			
	SA22-AL21	NO	(Black)		Protruding button
	SA22-AL31	NO	(Green)		
	SA22-AL42	NC	(Red)		
	SA22-AL51	NO	(Yellow)		
	SA22-AL61	NO	(Blue)		
	SA22-AW3□B5	NO+NC	□Color number 3(Green) 4(Red) 5(Yellow) 6(Blue) 7(Transparent)	B: 24V G: 48~120V M: 220~240V	With light BA9S lamp socket LED
	SA22-AW3□G5				
	SA22-AW3□M5				
	SA22-AVB□		□Color number 3(Green) 4(Red) 5(Yellow) 6(Blue) 7(Transparent)	B: 24V G: 48~120V M: 220~240V	With light BA9S lamp socket LED
	SA22-AVG□				
	SA22-AVM□				

Push Button Plastic Series

Shape	Reference	Contact Type	Colour	Voltage	Remark
	SA22-AL8325 SA22-AL8425	NO+NC	(Red)+(Green)		Double button Without led lamp 
	SA22-AW8365 SA22-AW8465	NO+NC	(Red)+(Green)	6~220V	Double button With led lamp 
	SA22-AP21 SA22-AP31 SA22-AP42 SA22-AP51 SA22-AP61	NO NO NC NO NO	(Black) (Green) (Red) (Yellow) (Blue)		Protect cap Protruding button Degree of protection IP65
	SA22-AS142	NC	(Red)		Mushroom head Key release Φ40
	SA22-AL9312 SA22-AL9434	NO+NC	(White)+(Black) (Red)+(Green)		Flush + Projecting Projecting + Flush Degree of protection IP65

Push Button Plastic Series
Push Button Metal Series

Shape	Reference	Contact Type	Colour	Voltage	Remark
	SA22-AK1235 SA22-AK1245 SA22-AK1255 SA22-AK1265 SA22-AK1335 SA22-AK1345 SA22-AK1355 SA22-AK1365	NO+NC	(Green) (Red) (Yellow) (Blue)	6~220V	LED lamp socket LED 2-position locked 3-position locked
	SA22-AA3311 SA22-AA3341 SA22-AA3351 SA22-AA3331 SA22-AA4322 SA22-AA4342	NO NC	     		Flush with mark
	SA22-BK1235 SA22-BK1245 SA22-BK1255 SA22-BK1265 SA22-BK1335 SA22-BK1345 SA22-BK1355 SA22-BK1365	NO+NC	(Green) (Red) (Yellow) (Blue)	6~220V	LED lamp socket LED 2-position locked 3-position locked
	SA22-BA3311 SA22-BA3341 SA22-BA3351 SA22-BA3331 SA22-BA4322 SA22-BA4342	NO NC	     		Flush with mark

Push Button Metal Series

Shape	Reference	Contact Type	Colour	Voltage	Remark
	SA22-BA21	NO	(Black)		Flush
	SA22-BA31	NO	(Green)		
	SA22-BA42	NC	(Red)		
	SA22-BA51	NO	(Yellow)		
	SA22-BA61	NO	(Blue)		
	SA22-BA25	NO+NC	(Black)		
	SA22-BA35	NO+NC	(Green)		
	SA22-BA45	NO+NC	(Red)		
	SA22-BC21	NO	(Black)		Spring return BC: Φ40 BR: Φ60
	SA22-BC31	NO	(Green)		
	SA22-BC42	NC	(Red)		
	SA22-BC51	NO	(Yellow)		
	SA22-BR21	NO	(Black)		
	SA22-BR31	NO	(Green)		
	SA22-BR42	NC	(Red)		
	SA22-BR51	NO	(Yellow)		
	SA22-BS442	NC	(Red)	Φ30	Turn to release Φ30 Φ40 Φ60
	SA22-BS442	NC		Φ40	
	SA22-BS642	NC		Φ60	
	SA22-BD21	NO			2-position locked 2-position locked 3-position locked 2-position reset 2-position reset 3-position reset
	SA22-BD25	NO+NC			
	SA22-BD33	NO+NO			
	SA22-BD41	NO			
	SA22-BD45	NO+NC			
	SA22-BD53	NO+NO			
	SA22-BJ21	NO			2-position locked 2-position locked 3-position locked 2-position reset 2-position reset 3-position reset
	SA22-BJ25	NO+NC			
	SA22-BJ33	NO+NO			
	SA22-BJ41	NO			
	SA22-BJ45	NO+NC			
	SA22-BJ53	NO+NO			

Push Button Metal Series

Shape	Reference	Contact Type	Colour	Voltage	Remark
	SA22-BG21	NO			2-position locked 2-position locked 3-position locked 2-position reset 2-position reset 3-position reset
	SA22-BG25	NO+NC			
	SA22-BG33	NO+NO			
	SA22-BG61	NO			
	SA22-BG65	NO+NC			
	SA22-BG73	NO+NO			
	SA22-BT42	NC	(Red)		Mushroom Push-pull Φ40 Φ60
	SA22-BT845	NO+NC			
	SA22-BL21	NO	(Black)		Protruding button
	SA22-BL31	NO	(Green)		
	SA22-BL42	NC	(Red)		
	SA22-BL51	NO	(Yellow)		
	SA22-BL61	NO	(Blue)		
	SA22-BW3□B5	NO+NC	□Color number 3(Green) 4(Red) 5(Yellow) 6(Blue) 7(Transparent)	B: 24V G: 48~120V M: 220~240V	With light BA9S lamp socket LED
	SA22-BW3□G5				
	SA22-BW3□M5				
	SA22-BVB□		□Color number 3(Green) 4(Red) 5(Yellow) 6(Blue) 7(Transparent)	B: 24V G: 48~120V M: 220~240V	With light BA9S lamp socket LED
	SA22-BVG□				
	SA22-BVM□				

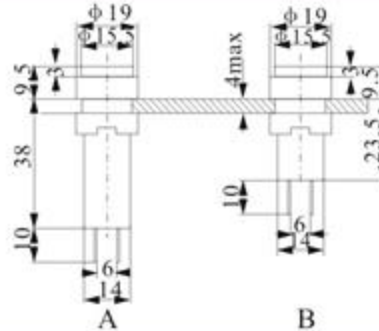
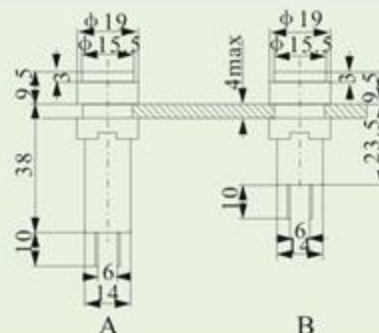
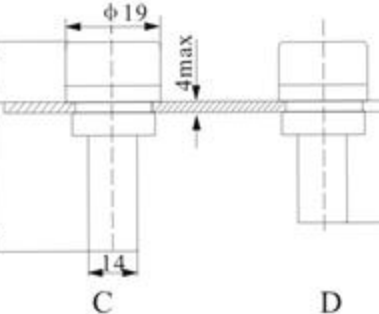
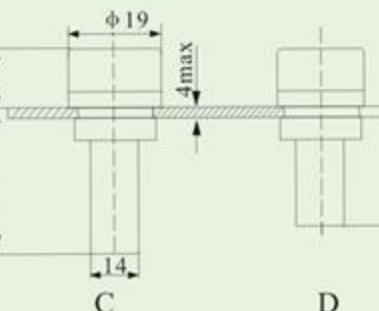
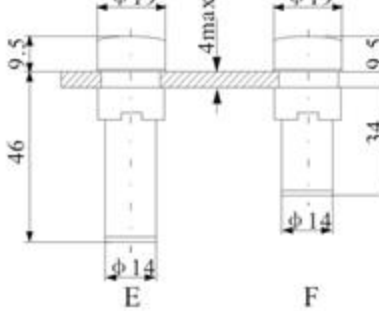
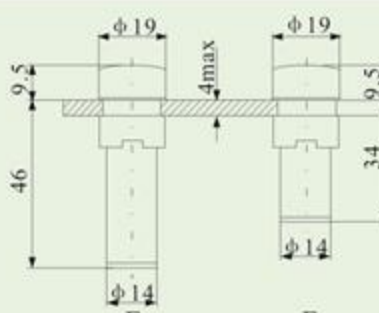
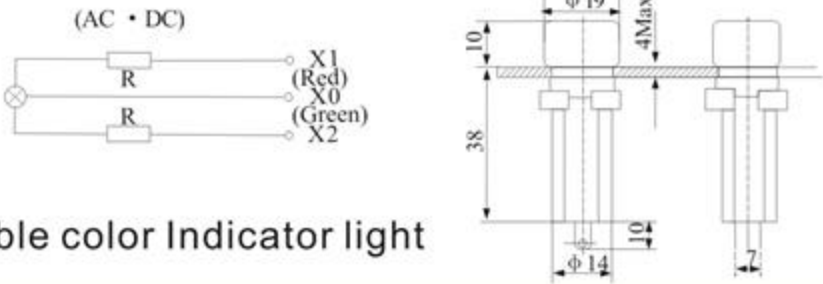
Push Button Metal Series

Shape	Reference	Contact Type	Colour	Voltage	Remark
	SA22-BL8325 SA22-BL8425	NO+NC	(Red)+(Green)		Double button Without led lamp 
	SA22-BW8365 SA22-BW8465	NO+NC	(Red)+(Green)	6~220V	Double button With led lamp 
	SA22-BP21 SA22-BP31 SA22-BP42 SA22-BP51 SA22-BP61	NO NO NC NO NO	(Black) (Green) (Red) (Yellow) (Blue)		Protect cap Protruding button Degree of protection IP65
	SA22-BS142	NC	(Red)		Mushroom head Key release Φ40
	SA22-BL9312 SA22-BL9434	NO+NC	(White)+(Black) (Red)+(Green)		Flush + Projecting Projecting + Flush Degree of protection IP65

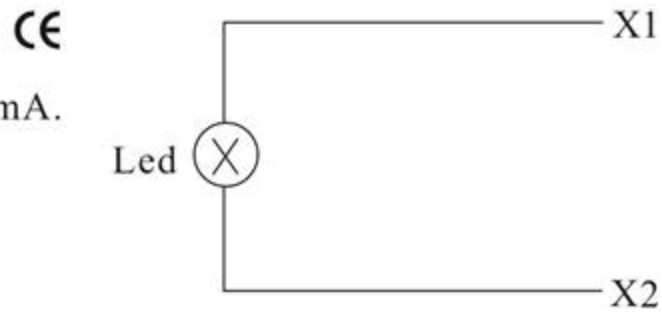
Push Button Parts

Shape	Reference	Contact Type	Colour	Voltage	Remark
	SA-PBE10 SA-PBE01 SA-PBE10B SA-PBE01B	NO NC NO NC	Green Red Green Red		
	SA-PBV-6			0-380V	Socket for BA9S bulb
	SA-PBV-M SA-PBV-MB		Green Red Yellow Blue	220V-250V	LED lamp with LED socket
	SA-PB-RR				Metal
	SA-PB-RT				Fire resistance nylon

Indicator Light
PL16-16 Series

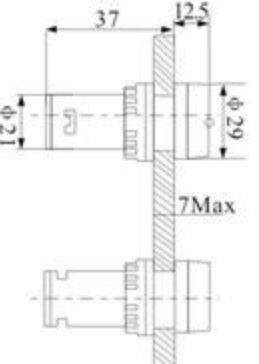
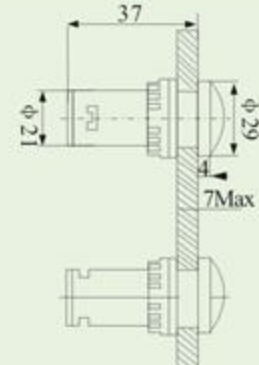
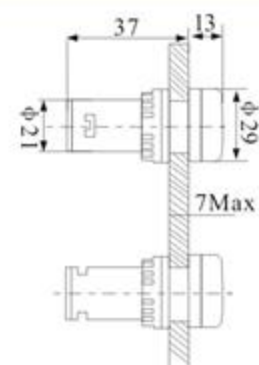
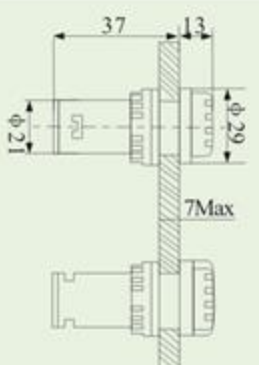
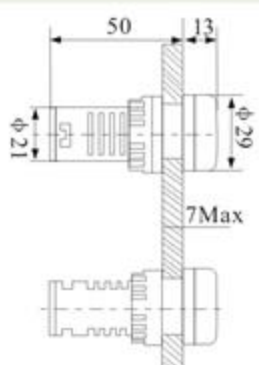
Model	Color	Light Voltage	Overall dimension
PL16-16A	Red Green Yellow Blue White	DC.AC 6V DC.AC 12V DC.AC 24V DC.AC 36V DC.AC 48V	 Φ 16A Indicator light 
PL16-16B	Red Green Yellow Blue White	DC.AC 6V DC.AC 12V DC.AC 24V DC.AC 36V DC.AC 48V DC.AC 110V DC.AC 127V DC.220V AC.220V/230V AC.380V	 Φ 16B Indicator light 
PL16-16C	Red Green Yellow Blue White	DC.AC 6V DC.AC 12V DC.AC 24V DC.AC 36V DC.AC 48V	 Φ 16C Indicator light 
PL16-16D	Red Green Yellow Blue White	DC.AC 6V DC.AC 12V DC.AC 24V DC.AC 36V DC.AC 48V DC.AC 110V DC.AC 127V DC.220V AC.220V/230V AC.380V	 Φ 16D Indicator light 
PL16-16E	Red Green Yellow Blue White	DC.AC 6V DC.AC 12V DC.AC 24V DC.AC 36V DC.AC 48V	 Φ 16E Indicator light 
PL16-16F	Red Green Yellow Blue White	DC.AC 6V DC.AC 12V DC.AC 24V DC.AC 36V DC.AC 48V DC.AC 110V DC.AC 127V DC.220V AC.220V/230V AC.380V	 Φ 16F Indicator light 
PL16-16S	Red / Green Red / Yellow Yellow / Green	DC.AC 12V DC.AC 24V DC.AC 36V DC.AC 48V DC.AC 110V DC.AC 127V DC.220V	 Φ 16S Double color Indicator light 

IEC60947-5-1
Electrical consumption is 20mA.
The material is anti fire.

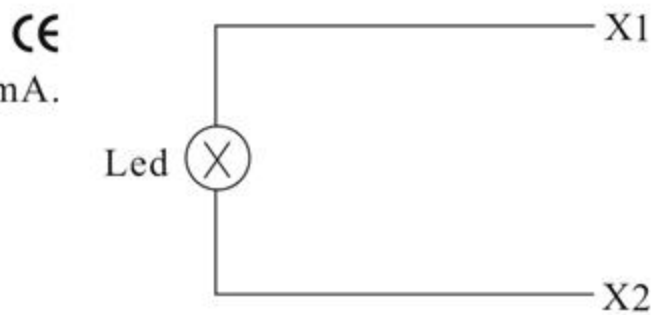


Notice:
1. A-B, C-D, E-F mainly is different in length, product will be supplied according with voltage when no special requirement.
2. DC power supply can be replaced by AC power.

Indicator Light
PL16-22 Series

Model	Color	Light Voltage	Overall Dimension
PL16-22B	Red Green Yellow Blue White	DC.AC 6V DC.AC 12V DC.AC 24V DC.AC 36V DC.AC 48V DC.AC 110V DC.AC 127V DC.220V FD.380V AC.220V/230V AC.380V	 Φ 22B Indicator light 
PL16-22C	Red Green Yellow Blue White	DC.AC 6V DC.AC 12V DC.AC 24V DC.AC 36V DC.AC 48V DC.AC 110V DC.AC 127V DC.220V FD.380V AC.220V/230V AC.380V	 Φ 22C Indicator light 
PL16-22D	Red Green Yellow Blue White	DC.AC 6V DC.AC 12V DC.AC 24V DC.AC 36V DC.AC 48V DC.AC 110V DC.AC 127V DC.220V FD.380V AC.220V/230V AC.380V	 Φ 22D Indicator light 
PL16-22E	Red Green Yellow Blue White	DC.AC 6V DC.AC 12V DC.AC 24V DC.AC 36V DC.AC 48V DC.AC 110V DC.AC 127V DC.220V FD.380V AC.220V/230V AC.380V	 Φ 22E Indicator light 
PL16-22DFM PL16-22DSM	Red Green Yellow Black	DC.AC 6V DC.AC 12V DC.AC 24V DC.AC 36V DC.AC 48V DC.AC 110V DC.AC 127V DC.220V AC.220V/230V AC.380V	 Φ 22DFM Buzzer(FM) Φ 22DSM Flash buzzer(SM) 
PL16-09D	Red Green Yellow Blue White	DC.AC 6V DC.AC 12V DC.AC 24V DC.AC 36V DC.AC 48V DC.AC 110V DC.AC 127V DC.220V AC.220V/230V	 Φ 09 LED Lamp

IEC60947-5-1
Electrical consumption is 20mA.
The material is anti fire.



Notice:
1. All ultra-short type lights are suitable for mounting holes Φ 22, Φ 25 without additional accessories.
2. "FD" is dischargeable indicator light of the capacitive cabinet.If the fixture density is too high, good heat radiating conditions should be offered.
3. Buzzer is intermittent sounding or flashing with 10cm/80db, current 15-20mA
4. If DC220V and a dischargeable lamp are required, longer light shell is available.
5. DC power supply can be replaced by AC power.