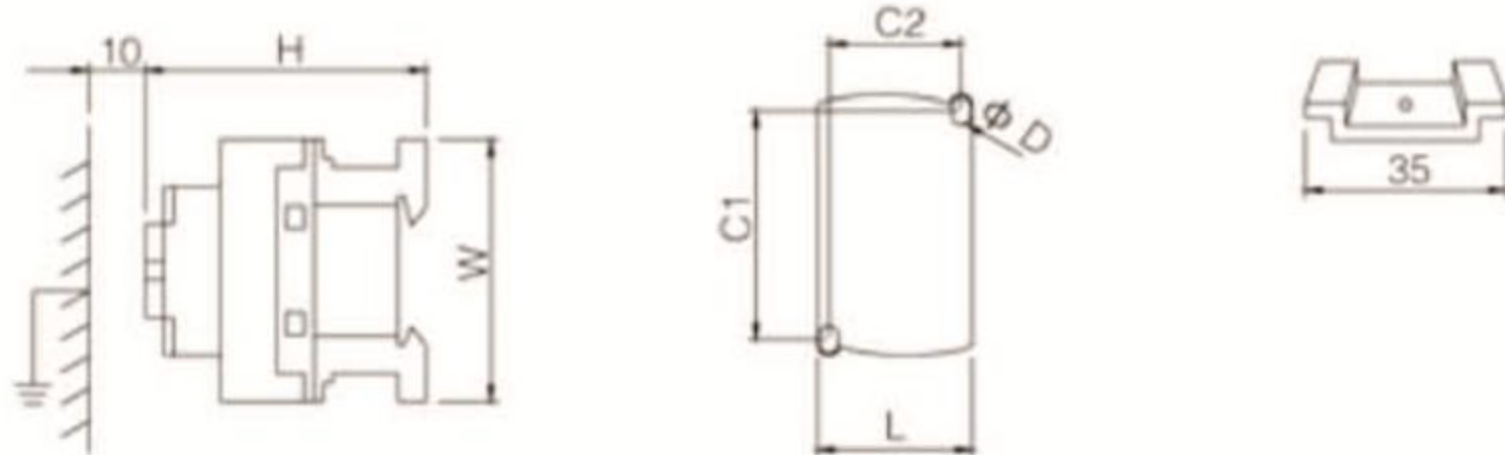


Ac contactor

SALC1-D Series 3P New type

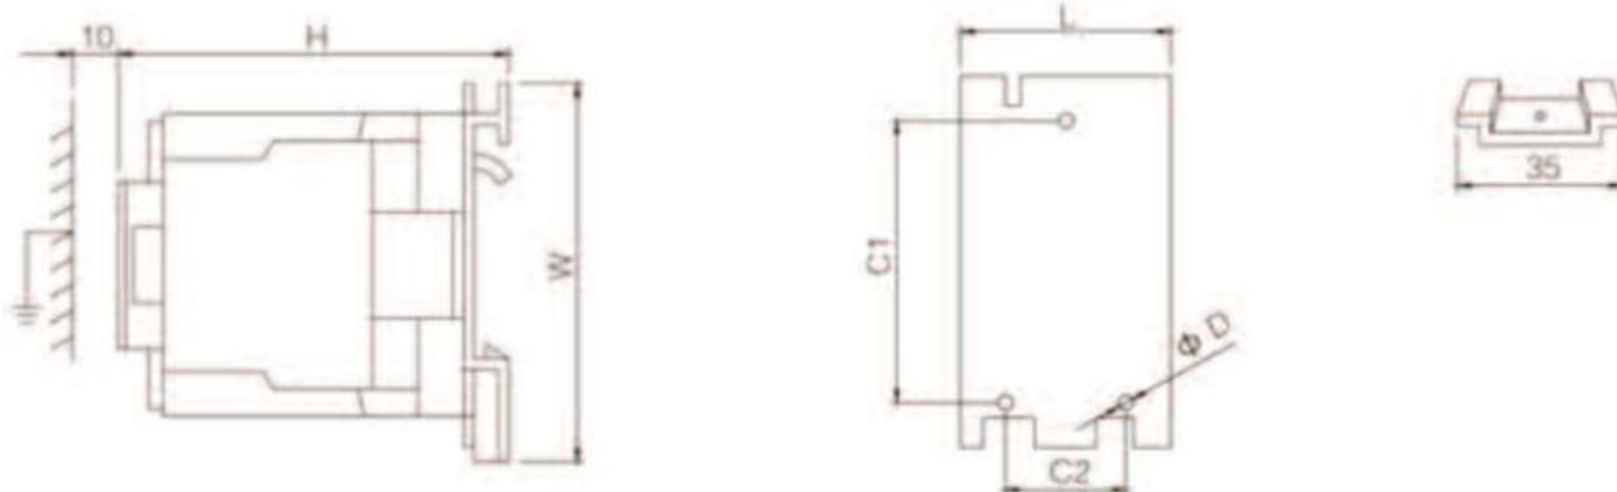
salzer

Outlook									
Type			SALC1-D09	SALC1-D12	SALC1-D18	SALC1-D25	SALC1-D32	SALC1-D38	
Rated power KW/HP (AC-3)	220V		2.2/3	3/4	4/5.5	5.5/7.5	7.5/10	9/12	
	380V		4/5.5	5.5/7.5	7.5/10	11/15	15/20	18.5/25	
Rated current Ie (AC-3)	220V		9	12	15	21	28	34	
	380V		9	12	18	25	32	38	
Rated heating current Ith(A)			25		32	40	50		
Rated insulated voltage Ui(V)			690						
Auxiliary contact AC-15	Contact	Standard	1NO+1NC						
	Rated current (A)	220V	1.6						
		380V	0.95						
AC-3 Electric life(10000times)			100				80		
Machanical life(10000times)			1000				800		
Outline and installation dimension (mm)									
			Type	L	W	H	C1	C2	ΦD
			SALC1-D09/18	45	77	86	50/60	35	4.5
			SALC1-D25/38	45	85	92	50/60	35	4.5

Ac contactor

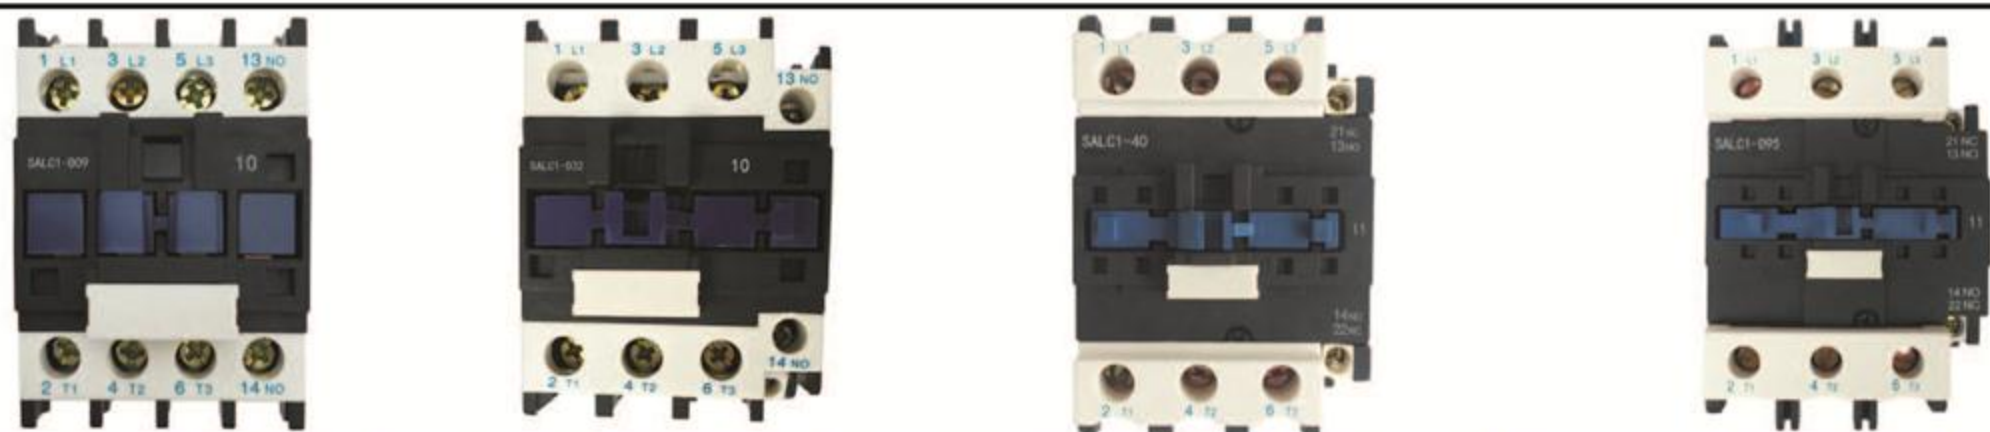
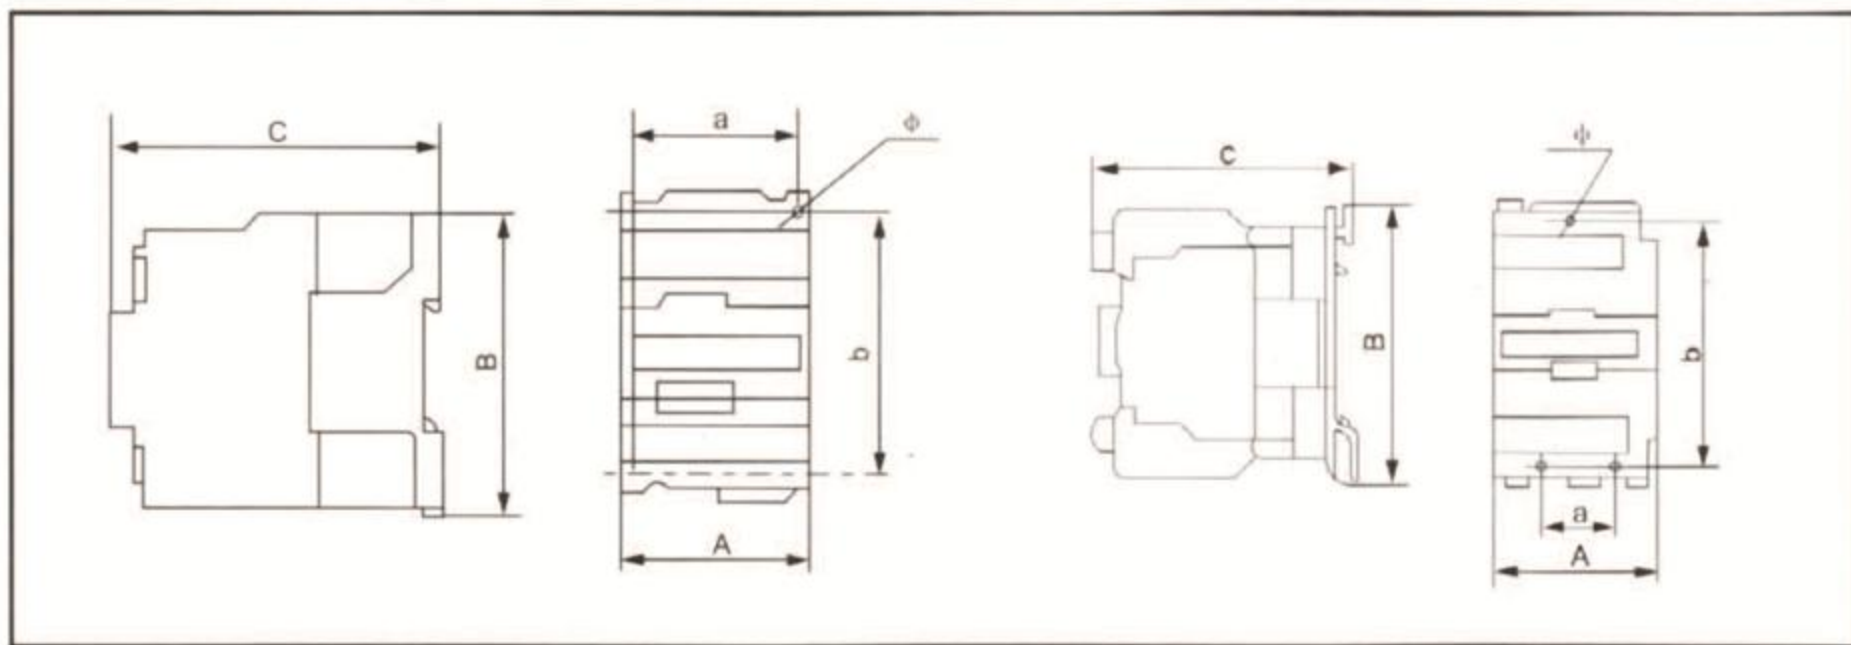
SALC1-D Series 3P New type

salzer

Outlook											
Type			SALC1-D40	SALC1-D50	SALC1-D65	SALC1-D80	SALC1-D95	SALC1-D115	SALC1-D150	SALC1-D170	
Rated power KW/HP (AC-3)	220V		11/15	15/20	18.5/25	22/30	25/35	30	40	55/75	
	380V		18.5/25	22/30	30/40	37/50	45/60	55/75	75/100	90/120	
Rated current Ie (AC-3)	220V		36	52	63	75	86	96	115	180	
	380V		40	50	65	80	95	115	150	170	
Rated heating current Ith(A)			60	80		125		200	250	250	
Rated insulated voltage Ui(V)			690								
Auxiliary contact AC-15	Contact	Standard	1NO+1NC								
	Rated current (A)	220V	1.6								
		380V	0.95								
AC-3 Electric life(10000times)			80			60					
Machanical life(10000times)			800			600					
Outline and installation dimension (mm)											
			Type	L	W	H	C1	C2	ΦD		
			SALC1-D40/65	75	127	119	100/110	40	6.5		
			SALC1-D80/95	85	127	130	100/110	40	6.5		
			SALC1-D115/170	120	158	136	130	96/110	8		

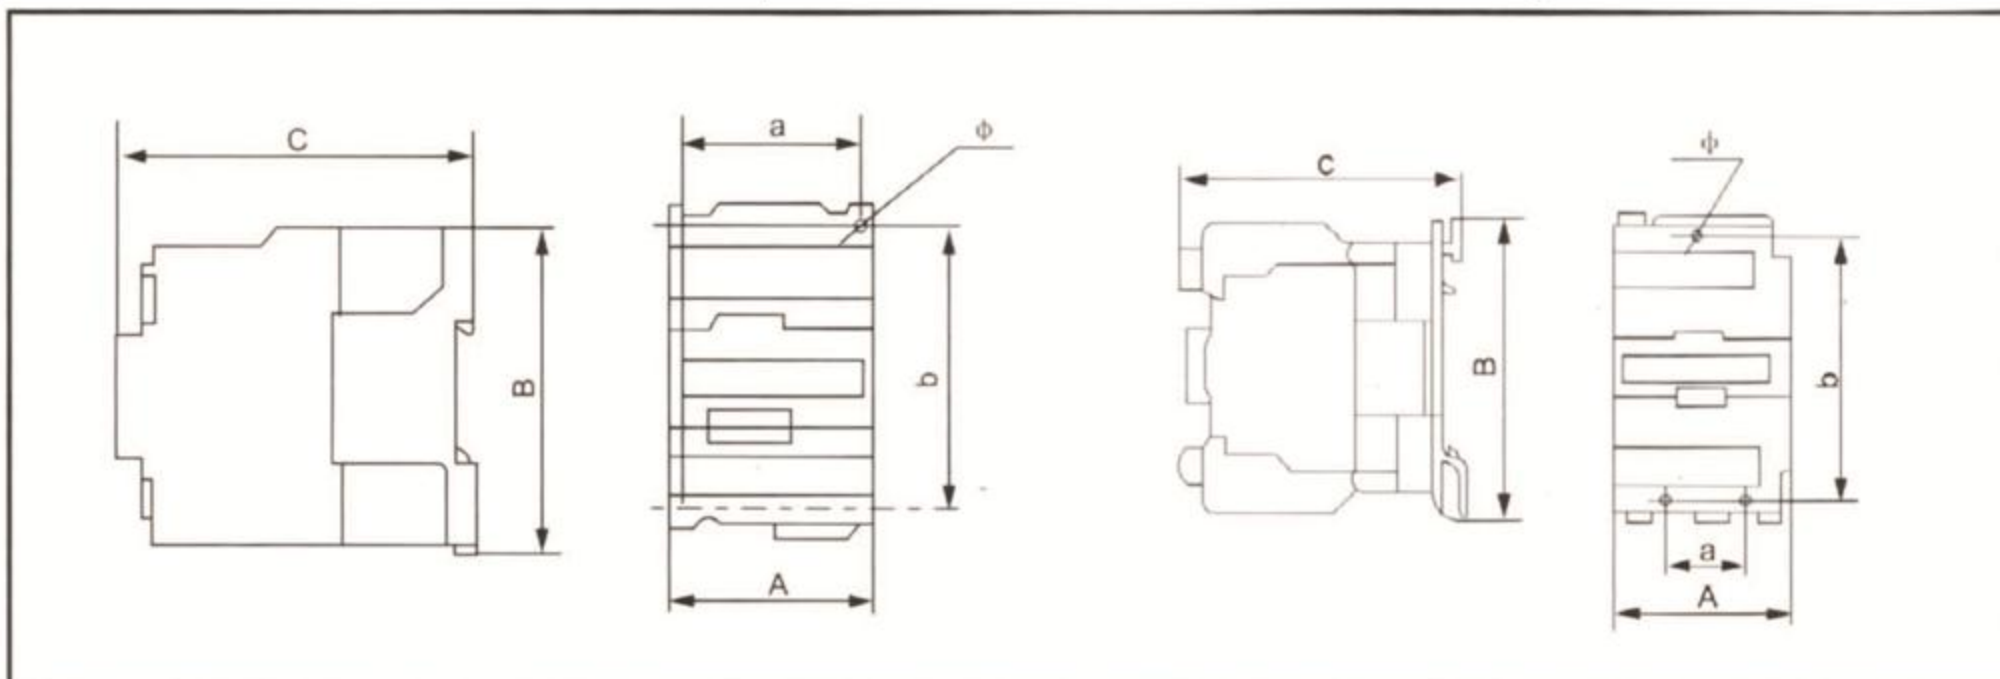
Ac contactor

SALC1-D Series 3P Old type

Outlook												
			SALC1-D09	SALC1-D12	SALC1-D18	SALC1-D25	SALC1-D32	SALC1-D40	SALC1-D50	SALC1-D65	SALC1-D80	SALC1-D95
Rated power KW/HP (AC-3)	220V		2.2/3	3/4	4/5.5	5.5/7.5	7.5/10	11/15	15/20	18.5/25	22/30	25/35
	380V		4/5.5	5.5/7.5	7.5/10	11/15	15/20	18.5/25	22/30	30/40	37/50	45/60
Rated current Ie (AC-3)	220V		9	12	15	21	28	36	52	63	75	86
	380V		9	12	18	25	32	40	50	65	80	95
Rated heating current Ith(A)			25		32	40	50	60	80	80	125	125
Rated insulated voltage Ui(V)			690									
Auxiliary contact AC-15	Contact	Standard	1NO/1NC					1NO+1NC				
	Rated current (A)	220V	1.6									
		380V	0.95									
AC-3 Electric life(10000times)			100				80				60	
Mechanical life(10000times)			1000				800				600	
Outline and installation dimension (mm)												
			Type	A		B		C	a	b	Φ	
			SALC1-D09/12	47		76		82	35	50	4.5	
			SALC1-D18	47		76		87	35	60	4.5	
			SALC1-D25	57		86		95	40	50	4.5	
			SALC1-D32	57		86		100	40	60	4.5	
			SALC1-D40/50/65	84		129		116	40	105	6.5	
			SALC1-D80/95	91		129		127	40	105	6.5	

Ac contactor

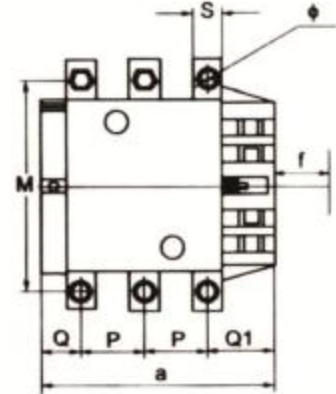
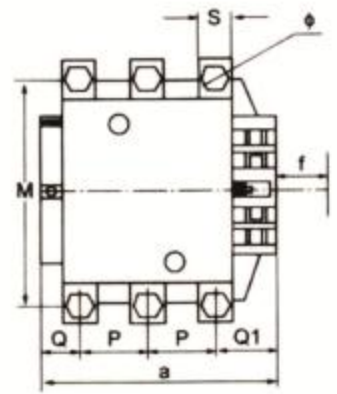
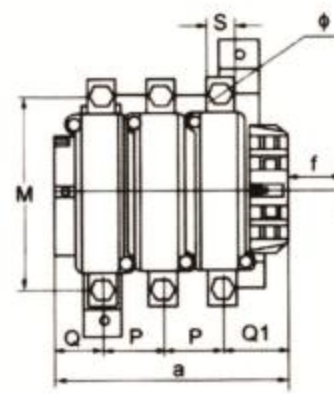
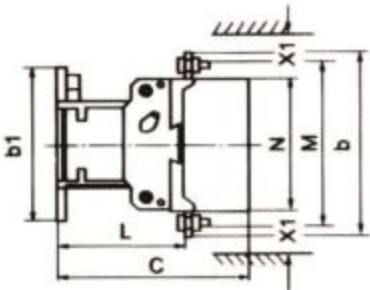
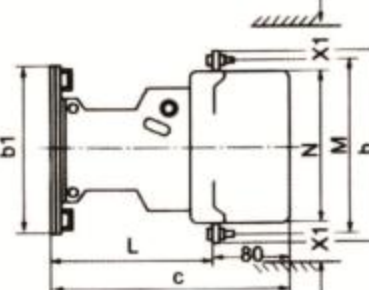
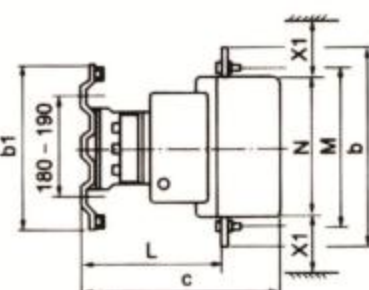
SALC1-D Series 4P Old type

Outlook									
Type		SALC1-D09	SALC1-D12	SALC1-D25	SALC1-D40	SALC1-D50	SALC1-D65	SALC1-D80	SALC1-D95
Rated power KW/HP (AC-3)	220V	2.2/3	3/4	5.5/7.5	11/15	15/20	18.5/25	22/30	25/35
	380V	4/5.5	5.5/7.5	11/15	18.5/25	22/30	30/40	37/50	45/60
Rated current Ie (AC-3)	220V	9	12	21	36	52	63	75	86
	380V	9	12	25	40	50	65	80	95
Rated heating current Ith(A)		25		40	60	80	80	125	125
Rated insulated voltage Ui(V)		690							
AC-3 Electric life(10000times)		100			80			60	
Machanical life(10000times)		1000			800			600	
Outline and installation dimension (mm)									
		Type	A	B	C	a	b	Φ	
		SALC1-D09/12	47	76	82	35	50	4.5	
		SALC1-D25	57	86	95	40	50	4.5	
		SALC1-D40/50/65	84	129	116	40	105	6.5	
		SALC1-D80/95	91	129	127	40	105	6.5	

Ac contactor

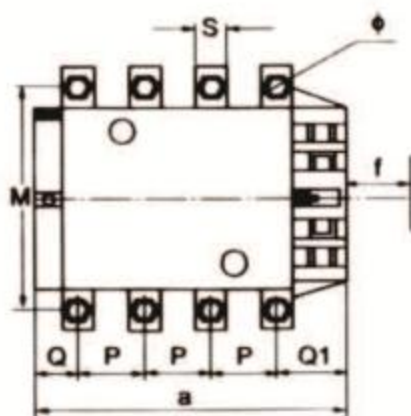
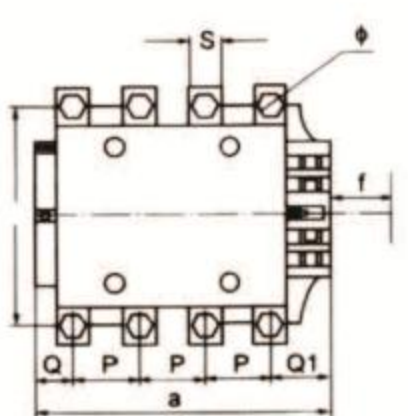
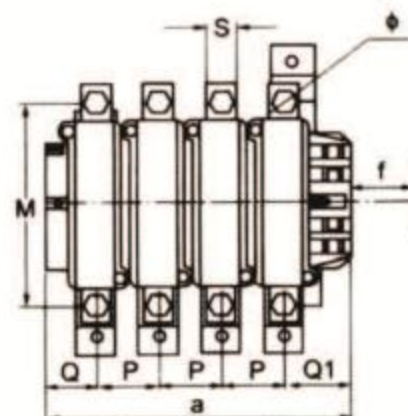
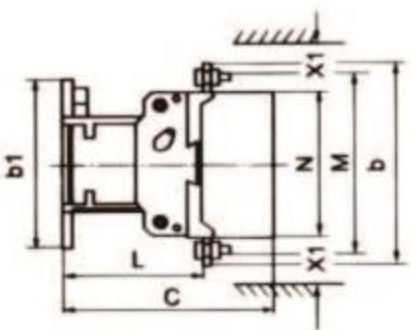
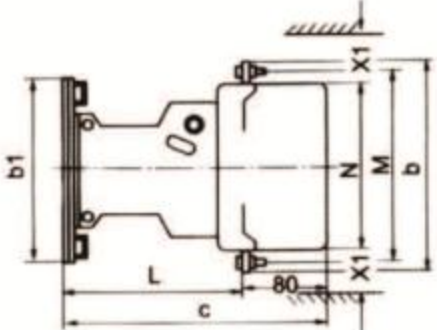
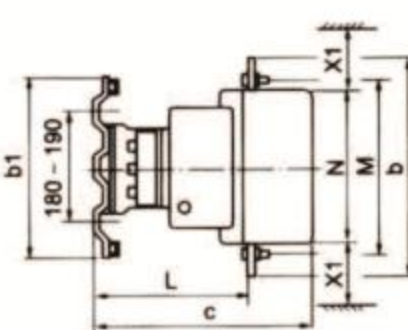
SALC1-F Series 3P



Outlook		 													
Type		SALC1-F115	SALC1-F150	SALC1-F185	SALC1-F225	SALC1-F265	SALC1-F330	SALC1-F400	SALC1-F500	SALC1-F630					
Rated power KW/HP (AC-3)	220V	30	40	55	63	75	100	110	147	200					
	380V	55	75	90	110	132	160	200	250	335					
Rated current Ie (AC-3)	380V	115	150	185	225	265	330	400	500	630					
Rated heating current Ith(A)		200	250	275	315	350	400	500	700	1000					
Rated insulated voltage Ui(V)		690													
AC-3 Electric life(10000times)		60			30										
Machanical life(10000times)		600			300										
Outline and installation dimension (mm)		SALC1-F115...330			SALC1-F400...500			SALC1-F630							
															
															
		Type	a	p	Q	Q1	S	Φ	f	b	b1	M	N	c	L
		SALC1-F115/150	163.5	37	26	60	15	M6	131	162	137	147	124	171	107
		SALC1-F185	168.5	40	29	59.5	20	M8	131	174	137	154	127	181	113.5
		SALC1-F225	168.5	48	21	51.5	25	M10	131	197	137	172	127	181	113.5
		SALC1-F265	201.5	48	39	66.5	25	M10	147	203	145	178	147	213	141
		SALC1-F330	213	48	43	74	25	M10	147	206	145	181	158	219	145
		SALC1-F400	213	48	43	74	25	M10	151	206	209	181	158	219	145
		SALC1-F500	233	55	46	77	30	M10	169	238	209	208	172	232	146
		SALC1-F630	309	80	60	89	40	M12	201	304	280	264	202	255	155

Ac contactor

SALC1-F Series 4P

Outlook															
Type		SALC1-F1154	SALC1-F1504	SALC1-F1854	SALC1-F2254	SALC1-F2654	SALC1-F3304	SALC1-F4004	SALC1-F5004	SALC1-F6304					
Rated power KW/HP (AC-3)	220V	30	40	55	63	75	100	110	147	200					
	380V	55	75	90	110	132	160	200	250	335					
Rated current Ie (AC-3)	380V	115	150	185	225	265	330	400	500	630					
Rated heating current Ith(A)		200	250	275	315	350	400	500	700	1000					
Rated insulated voltage Ui(V)		690													
AC-3 Electric life(10000times)		60			30										
Machanical life(10000times)		600			300										
Outline and installation dimension (mm)		SALC1-F115...330			SALC1-F400...500			SALC1-F630							
															
															
		Type	a	p	Q	Q1	S	Φ	f	b	b1	M	N	c	L
		SALC1-F1154/1504	200.5	37	25	60	15	M6	131	162	137	147	124	171	107
		SALC1-F1854	208.5	40	29	59.5	20	M8	131	174	137	154	127	181	113.5
		SALC1-F2254	208.5	48	17	47.5	25	M10	131	197	137	172	127	181	113.5
		SALC1-F2654	244.5	48	34	66.5	25	M10	147	203	145	178	147	213	141
		SALC1-F3304	261	48	43	74	25	M10	147	206	145	181	158	219	145
		SALC1-F4004	261	48	43	74	25	M10	151	206	209	181	158	219	145
		SALC1-F5004	288	55	46	77	30	M10	169	238	209	208	172	232	146
		SALC1-F6304	389	80	60	89	40	M12	201	304	280	264	202	255	155